



Fluid for a Fog Generation

Label

1 Introduction

Fluid for a fog generation Udar-T-F (hereinafter, the Udar-T-F) is used in security fog generator “Udar-T-2” (hereinafter, the Udar-T).

2. Security Requirements

2.1 Udar-T-F is not classified as dangerous and therefore is not subject to restrictions relating to hazardous or toxic substances.

2.2 Udar-T-F is safe for humans and animals during the whole storage period.

2.3 Symptoms and first aid measures are presented in Table 1.

Table 1

Exposure Factor	Symptom	First Aid Measures
Inhalation (if inhaled)	Not observed	Not required
Skin contact	Potential slight irritation	Rinse with water
Eye contact	Concentrated fluid may cause irritation.	Rinse with water
Ingestion	Mild irritation of the gastrointestinal tract	Drink water

Attention! For external use only!

3. Renewal of Fluid Vessel

Attention! Renewal of the fluid vessel should be fulfilled only if the Udar-T is de-energized!

3.1 Turn a vessel with the neck upwards. Disconnect fluid supply pipe and loop from the level PCB

3.2 Put off shipping protecting cup from the sleeve together with cable tie (Figure 1). Connect fluid supply pipe from the Udar-T-2 to sleeve of the new vessel and fasten it by cable tie.

3.3 Put off shipping protecting cup from the pressure stabilization sleeve (Figure 1)



Figure 1

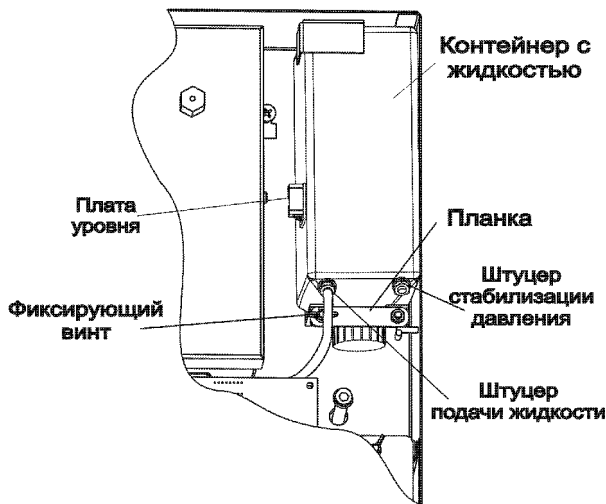


Figure 2

3.4 Hook up the loop to the level printed circuit board (PCB) located on the vessel wall.

3.5 Insert vessel into the fitting location with its neck directed downwards, turn the frame and tighten retention screw (Figure2).

Attention! The pipe rising from the vessel **should not have excessive bends.**

4 Storage and Transportation

4.1 Fluid for a fog generation should be stored in hermetically sealed plastic containers.

4.2 The ambient storage temperature should not exceed the limits: from minus 50 °C to +50 °C.

4.3 «Udar-T-F» in its original packing may be shipped by any transport means in closed vehicles over any distances in compliance with

the existing shipping rules concerning the respective means of transportation.

5 Manufacturer's Guarantees

5.1 The manufacturer guarantees conformity of the «Udar-T-F» to its Technical Specifications provided that the transportation, storage, installation and operation conditions are observed.

5.2 The guaranteed shelf life of the «Udar-T-F» is 24 months since the date of manufacture.

5.5 If you experience difficulties while installing and operating “Udar-T-F”, we recommend to contact technical support service by phone: +7 (812) 233-29-53, 703-13-57 or by e-mail: support@rielta.com.

Rev. 1 dd. 26.09.2019

Made in Russia

«RIELTA» JSC

Est.17, Chapaeva Str., Saint Petersburg 197101, Russia

www.rielta.com

e-mail rielta@rielta.com

Tel./fax: +7 (812) 233-0302, 703-1360,

Technical support, tel. +7 (812) 233-29-53, 703-13-57, support@rielta.com

